


# QUAD

## 150 CL3 & 250 CL3




### DIMENSIONS

#### • QUAD 150 CL3

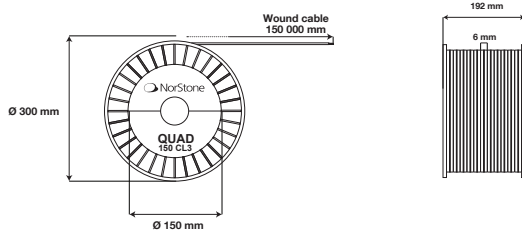

#### • QUAD 250 CL3

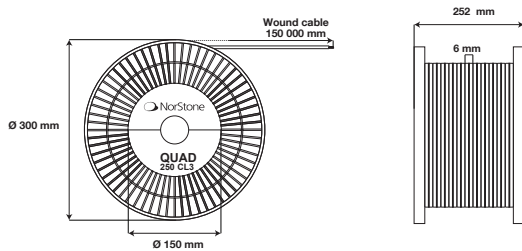

### SPECIFICATIONS



Loudspeaker



Amplifier

### CABLES LENGTH

1 x 150m QUAD 150 ..... 3700795184585  
NORQUAD150150

1 x 150m QUAD 250..... 3700795184578  
NORQUAD250150

### DESCRIPTION

The Nortstone Quad speaker cable has a PVC jacket and four multi-stranded conductors surrounded by an aluminum strip. CL3, it withstands a temperature of 80 ° / 176°F, delays its combustion and releases less toxic gas in case of fire. 99.999% OFC, it offers excellent performances with better dynamics and a more intelligible sound message.

### DESIGN

Shape : *Round section, colour code*

Finition : *Matt white flexible PVC sheath*

Marquage : *Optimal cable direction*

### SHEATH 150 CL3

Structure : *Cuivre 99.999% OFC - CL3 Fire retardant (80°C /176 °F)*

Resistance : *0.01428 Ω*

Capacitance : *205.170 pF/m*

Section : *4 x 1.5 mm<sup>2</sup>, outer diameter 6 mm*

Length : *150m*

### CONDITIONING 150 CL3

Quantity/spool : *1*

Type : *spool*

Dimensions (L x H x P) : *320 x 320 x 282 mm*

Net weight : *14,5 kg*

Gross weight : *15,2 kg*

### SHEATH 250 CL3

Structure : *Cuivre 99.999% OFC - CL3 Fire retardant (80°C /176 °F)*

Resistance : *0.00873 Ω*

Capacitance : *275.160 pF/m*

Section : *4 x 2.5 mm<sup>2</sup>, outer diameter 6 mm*

Length : *150m*

### CONDITIONING 250 CL3

Quantity/spool : *1*

Type : *spool*

Dimensions (L x H x P) : *320 x 320 x 222 mm*

Net weight : *21,0 kg*

Gross weight : *21,7 kg*